

Solid State Pressure Sensor


ANALOG
OUTPUT



CCD Series – Model 53A

FEATURES

- Dual-in-line Package
- Calibrated Span and Offset
- Multi-order Temperature Compensation
- Rigid ceramic package
- 0.15 PSI to 150 PSI
- Optional Configuration Upon Request

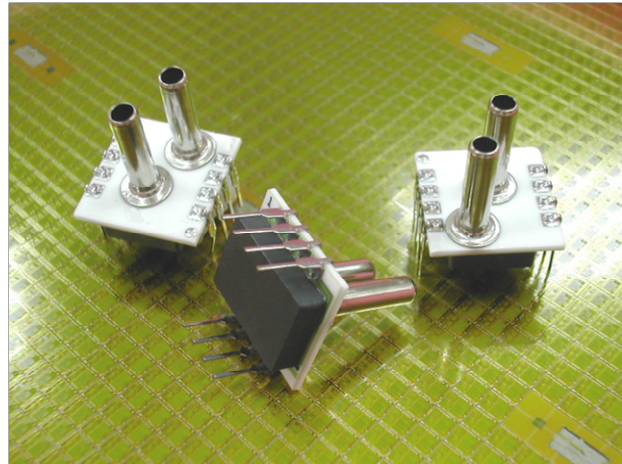

DESCRIPTION

The CCD 53A Series is a smart pressure sensor with a calibrated and amplified analog output. Compensation of sensor offset, sensitivity, temperature drift and nonlinearity is accomplished in the factory via the latest ASIC technology with calibration coefficients stored in an on-chip EEPROM.

A variety of output configurations, including response time and voltage levels are available to provide a simple and ready-to-use solution for a wide range of applications. The low voltage version operates from 2.7 to 3.3V while the regular version operates from 4.5 to 5.5V.

The CCD Series including Models 53 and 54, are available for pressure ranges from 0.15 psi to 150 psi. Custom ranges and calibrations are available. Please contact the factory for details.



RM/1005/10F Ho King Comm Ctr,
2-16 Fa Yuen St. Mongkok Hong Kong,
Tel: +852 81973212
Email: info@senphire.com
www.senphire.com

Senphire Ltd. reserves the right to change specifications without prior notice

Characteristics


Unless otherwise specified, all parameters are measured at 5Vdc excitation, 25 °C and 60% RH

Parameters	Min	Typ	Max	Unit
Supply Voltage ^{Note 3}	2.7 to 3.3		4.5 to 5.5	V
Supply Current			2.5	mA
Pressure Range ^{Note4}	5		150	psi
Zero Output (Offset)	0.428	0.500	0.572	V
Full Scale Output	4.428	4.500	4.572	V
Accuracy ^{NOTE 1}			1.8	%FS
Response Time		1	2	ms
Linearity	-0.3		+0.3	%FS
Thermal Hysteresis	-0.15		+0.15	%FS
Over Pressure			2X	Rated Pressure
Temp - Compensated	0		+50	°C
Temp - Operating	-20		+85	°C
Temp - Storage	-40		+125	°C

Notes:

1. Accuracy includes non-linearity, hysteresis, TCS and TCO inside the compensated temperature range, Best Fit Straight Line definition
2. Wetted material contains, Nicke ,RTV, glass, silicon and ceramic (Port A & B) and Au (Port A)
3. Specify desired operating voltage range when ordering. Output is ratiometric to supply voltage
4. See ordering information for list of available pressure ranges

Dimensions:

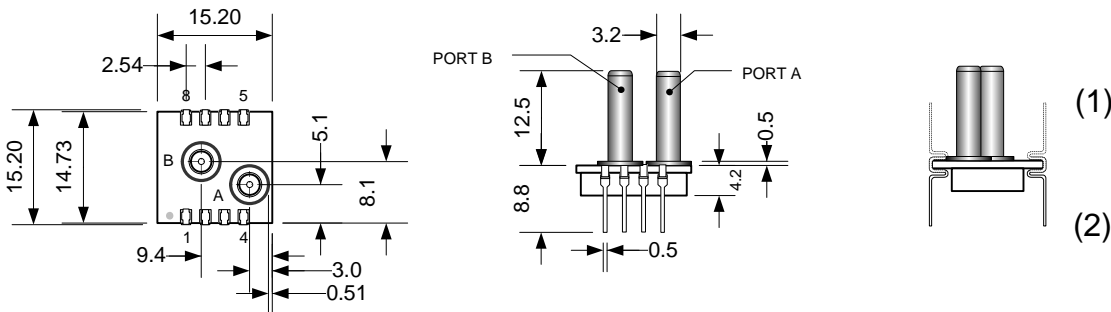

Pin #	Description
1	N.C.
2	VSS
3	OUT
4	Vdd
5	N.C.
6	N.C.
7	N.C.
8	N.C.

NOTE:
 N.C. pins must be left floating
 A 0.1 uF capacitor must be connected between Vss and Vdd

NOTE:


1. Port B is used for positive differential
2. Port A is used for Absolute
3. Port B is used for Gauge
4. All dimensions are in mm
5. Solder reflow max. 250 °C 5s

Delivery : 17 pcs per tube



RM/1005/10F Ho King Comm Ctr,
 2-16 Fa Yuen St. Mongkok Hong Kong,
 Tel: +852 81973212
 Email: info@senphire.com
 www.senphire.com

Ordering Information

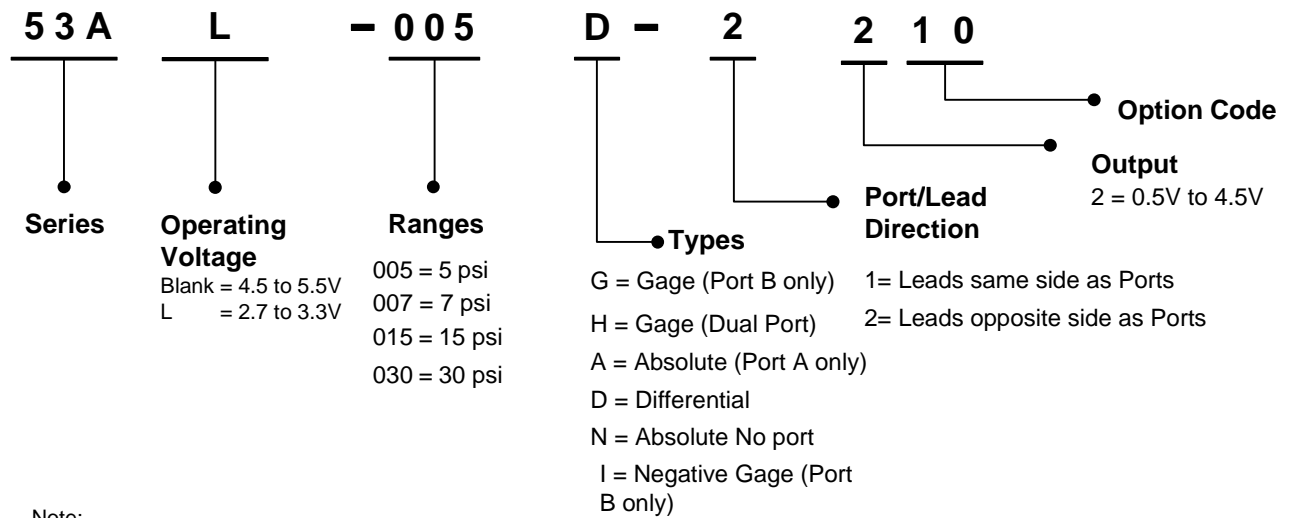

Note:

- 1) To specify single ended differential pressure (one side is always more +ve than the other) specify gage pressure with Dual port configuration. The device can be used for differential pressure by simply connecting the reference port (Port A) to the reference pressure instead of atmosphere.
- 2) Specifying Differential pressure means a +/- pressure range.
- 3) Differential pressure can only be specified to a maximum of +/-30 psi.
- 4) Custom outputs and pressure ranges available. Please contact us with your requirement
- 5) Maximum pressure for Negative Gage pressure (Type I) is -15 psi. Negative gage has the Offset (0 psi) at 0.5V and the span (-xx psi) at 4.5V where xx is the specified full scale pressure
- 6) The minimum absolute pressure that can be specified is 15 psi

Example:

Part number 53A 005 D 22 20 corresponds to 2.5V (@ 0 psi) +/- 2V (@ +/- 5 psi)
 Part number 53A 005 G 22 20 corresponds to 0.5V (@ 0 psi) to 4.5V (@ 5 psi) for gage applications only
 Part number 53A 005G 22 20 corresponds to 0.5V (@ 0 psi) to 4.5V (@ 5 psi) for gage or single ended differential applications.

Disclaimer/Warranty/Notice

Senphire Ltd products are not authorized for use in applications where failure could result in loss of life or injury. While Senphire provides application assistance personally, through our literature and website, it is the responsibility of the customer to determine the suitability of the product for the intended application.

All information provided is believed to be accurate at the time of publishing however Senphire Ltd reserves the right to make changes without prior notice.

Senphire Ltd warrants its products to be free of manufacturing defects for a period of 12 months from the date of purchase. The maximum liability, expressed or implied shall be limited to a direct replacement of those products Senphire finds defective. The foregoing is the Buyers Sole remedy in lieu of all other warranties, expressed or implied including those of merchantability and fitness for a particular purpose.



RM/1005/10F Ho King Comm Ctr,
 2-16 Fa Yuen St. Mongkok Hong Kong,
 Tel: +852 81973212
 Email: info@senphire.com
 www.senphire.com

Ver 1.8 7-Apr-14